



ZipTag CE36037




The unique zip tie design of the ZipTag makes it the ideal solution for difficult to tag assets, including cylinders, tanks, kegs and tools.

KEY Features:

- Easy, permanent attachment method
- IP67 water resistant rated
- Read range up to 6 meters
- Customized zip tie length available

Application:

- Packaged Gas Cylinders
- Keg & Beverage Tanks
- Cabling
- Medical Assets
- Industrial/Commercial Tools

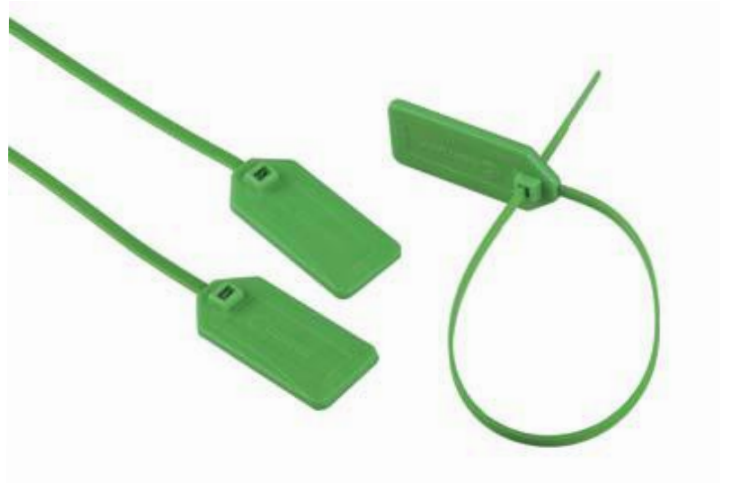


SPECIFICATIONS


Name	ZipTag	
Code No.	CE36037	
	PHYSICAL	
Dimension(mm/in)	60×28×2.7 mm (2.36" × 1.10" × 0.11 in)	
Zip Tie Length	300/350/400 mm or customized	
Casement	ABS	
Color	Green/customized	
Printing	Printing and encoding according as customized	
Attachment Method	Cable zip tie	
	ELECTRICAL	
Protocol	ISO/IEC 18000-6C & EPC global Class 1 Gen 2	
Operating Frequency	866-869MHz	902-928MHz
integrated Circuit [IC]	Alien H3	
EPC Memory	128 bits	
User Memory	512 bits	
Unique TID	96 bits	
Access Password	32 bits	
Kill Password	32 bits	
Read Range(2W EIRP Reader)	EU: Up to 6 meters US: Up to 6 meters	
Expected read cycles	100000 cycles	
Data retention	10 years	
	PACKING	
Packing Format	Pieces by pieces and packed in bags	
Weight per pieces	8.5 g	
Quantity per box	1000 pcs	
Box Dimension	40.5×30.5×26 mm (1.59×1.20×1.02 in)	
Weight per box	8.5 kg	
Quality Assurance	100% performance tested	
	ENVIRONMENTAL	
Operating Temperature	-20℃ - 50℃ (-4°F - 122°F)	
Operating Humidity	30% - 70%	
Storage Temperature	-20℃ - 50℃ (-4°F - 122°F)	
Storage Humidity	30% - 70%	
IP Rating	IP 67	
Expected lifetime	2 years	
Guarantee	2 years	
Certificate	EPC Global	

READ RANGE

Frequency Test Chart

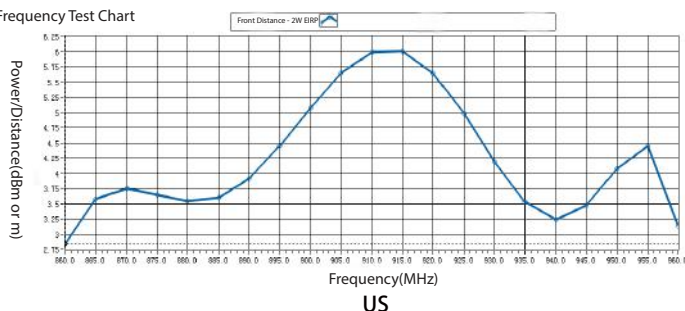

Frequency Test Chart

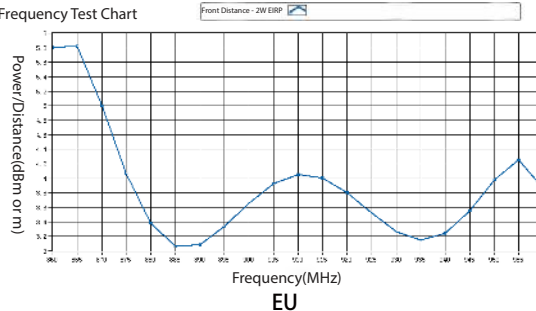

For more information and free samples, please contact your nearest Century RFID office

Century RFID Headquarters

528 Xingqi Road, Yuhang economic development Area, Hangzhou, PR, China

Email: rfid.info@century-cn.com

Tel: +86-571-28818756

Century RFID America

10 N. Martingale Road, Suite 400, Schaumburg, IL 60173

Email: rfid.info@century-cn.com

Tel: (877) 801-5087

www.centurylinkrfid.com
www.century-cn.com

This document and the information it contains are the exclusive property of Century RFID. All Rights reserved. Any unauthorized reproduction is strictly prohibited. RFID performance can vary widely. For that reason always test before purchasing.

